


## Advices for a successful installation

Mount the bracket 'A' to the wall.

Support the elements to the bracket and fix it to the wall through fisher, now balance the cabinet using the screws inside hooks "B".

Pierce the pilot-holes on the sides of the cabinet and joined together with the special ties "C".

Fix the floor by screwing to the roof of the base cabinets and to the passers-by of the washbasin's base 'D'.

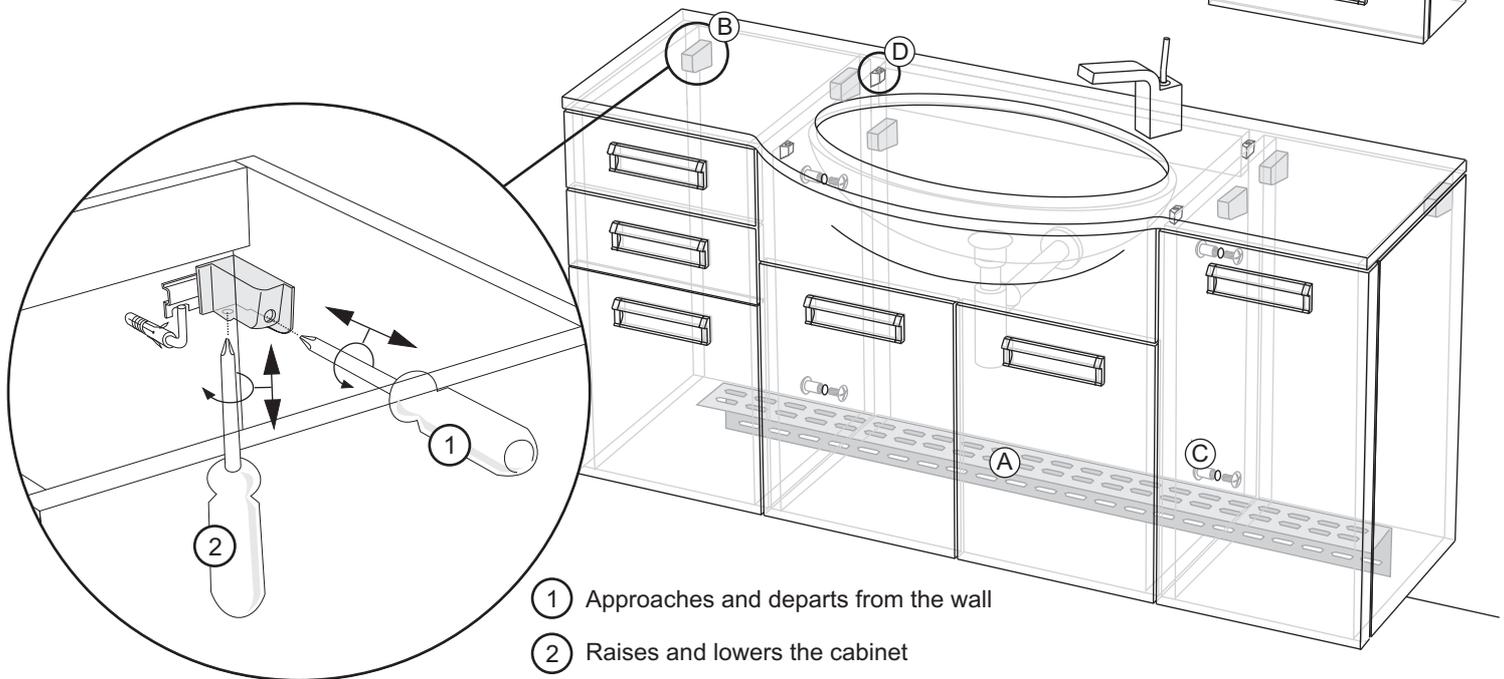


- ① Approaches and departs from the wall
- ② Raises and lowers the cabinet

## Attachment point of the bases

Heights of hooks useful for proper installation of the suspended base.

- Ⓐ Base with door
- Ⓑ Base for washbasin
- Ⓒ Base with drawers

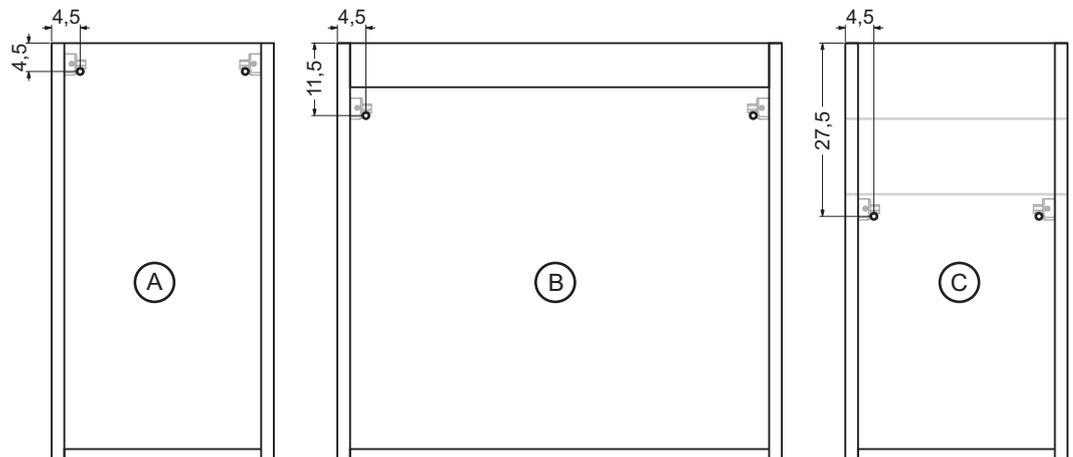


## Assembly of the cabinet with plinth

Support the plinth 'A' on the ground in the location where you want install the cabinet.


Support the elements to the plinth, fix it to the wall through fisher and balance the cabinet using the screws inside hooks "B".

Pierce the pilot-holes on the sides of the cabinet and joined together with the special ties "C".


Fix the floor by screwing to the roof of the base cabinets and to the passers-by of the washbasin's base 'D'.

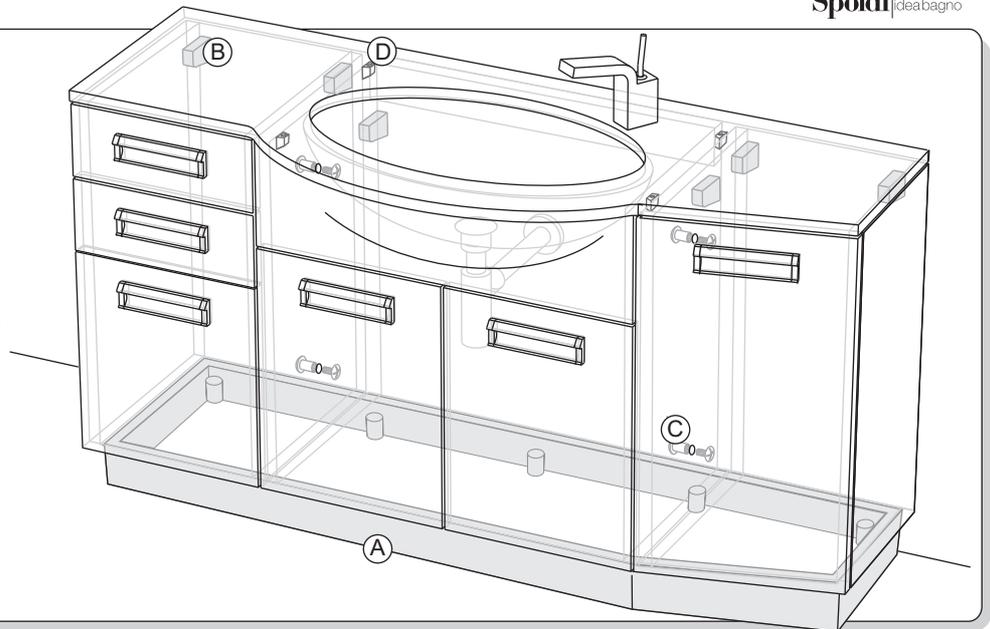

## Mining and insertion of the drawer

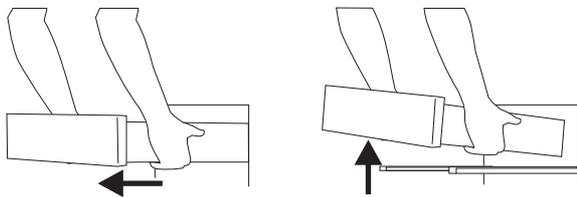


Mining: totally mines and pull hard upward

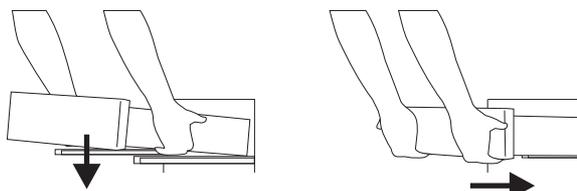


Insertion: support the rails and push until the end.

## Drawer's setting

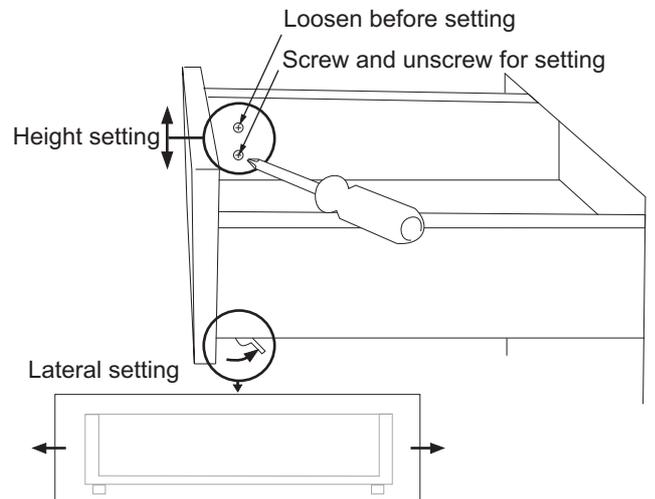


## Door's disassembly

To remove the door put pressure on the hinge at the points indicated

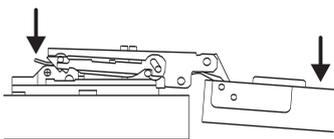


## Door's assembly


Bring the two points as indicated by the arrow

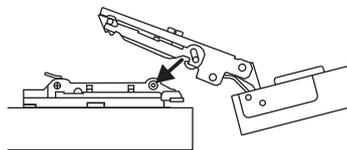

Rotate slightly

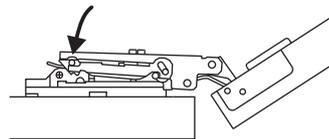


Apply light pressure

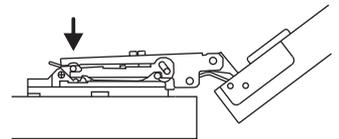


## Door's setting


Loosen and tighten the screws A, B and C to adjust the unit door according to the directions indicated in the drawing.

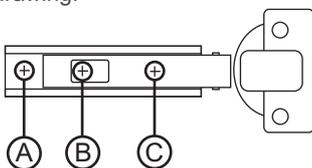

Ⓐ back and forth

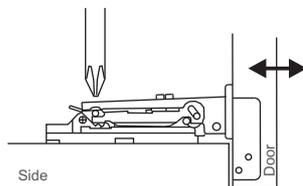

Ⓑ high and low



Ⓒ right and left

